


FIXING AT TOP OF ROCK FACE (TYPE 1)

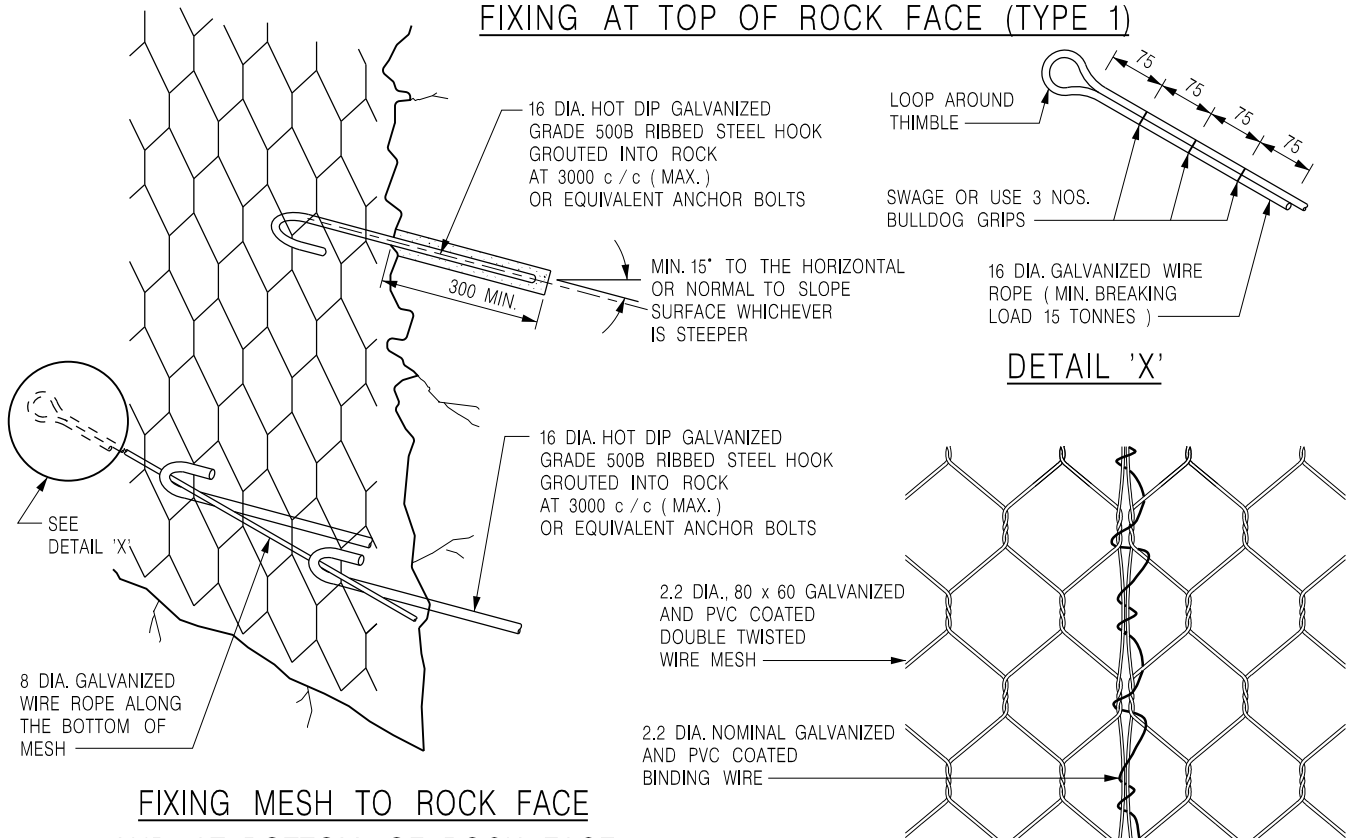

FIXING MESH TO ROCK FACE AND AT BOTTOM OF ROCK FACE


DETAIL 'X'

LACING OF ADJACENT MESH SHEETS

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES.
2. PVC THICKNESS SHALL BE 0.4mm MINIMUM.
3. COLOUR OF PVC COATING SHALL BE SPECIFIED BY THE ENGINEER TO MATCH WITH COLOUR OF ROCK FACE WHERE POSSIBLE.
4. SPACING OF THE STEEL HOOKS OR EQUIVALENT ANCHOR BOLTS SHALL BE REDUCED WHERE APPROPRIATE TO ENSURE THAT THE WIRE MESH CLOSELY FOLLOWS THE ROCK SLOPE PROFILE PARTICULARLY ON RUGGED ROCK SURFACE.
5. REFER TO SHEET 2 OF 2 FOR ALTERNATIVE FIXING OF WIRE MESH AT TOP OF ROCK FACE.

FIXING OF WIRE MESH TO ROCK FACE (SHEET 1 OF 2)

-	FORMER DRG. NO. C2205F	Original Signed	08.2024
REF.	REVISION	SIGNATURE	DATE
 CIVIL ENGINEERING AND DEVELOPMENT DEPARTMENT			
SCALE DIAGRAMMATIC		DRAWING NO.	
DATE JAN 1991		C2205 /1	